




Choice of Cab Elevations and Cab Protections

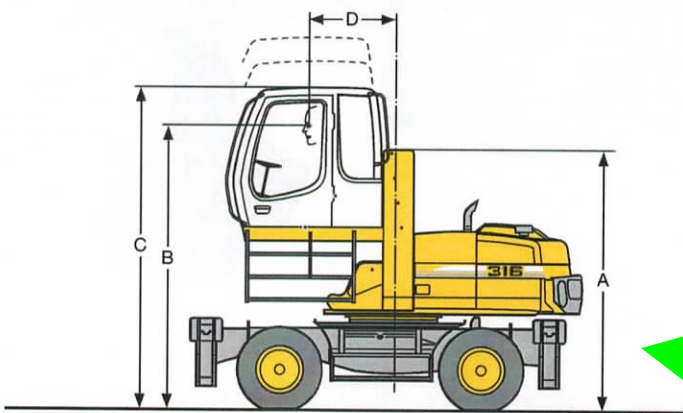

Mechanical Cab Elevation

Height	mm	900	1200	1500
A	mm	3250	3250	3250
B	mm	3520	3225	4130
C	mm	4030	4330	4630
D	mm	1065	1110	1155

A rigid cab elevation has a fixed eye level height. For a lower transport height the shell of the cab can be removed. The overall height is then dimension A.

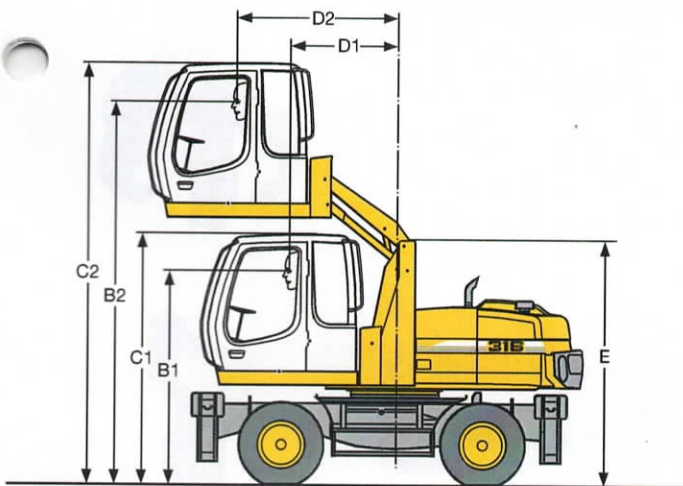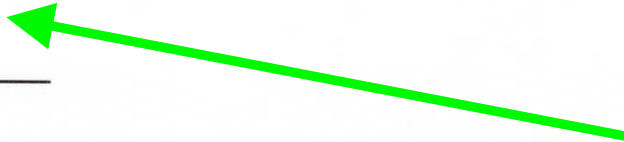


Hydraulic Cab Elevation


B1	2670 mm
B2	4785 mm
C1	3145 mm
C2	5260 mm
D1	1315 mm
D2	1990 mm
E	3055 mm

The parallelogram cab raiser allows the operator to choose his field of view between dimensions B1 and B2. For a transport height lower than C1 the shell of the cab can be removed. The overall height is then E.

Grille above and in front

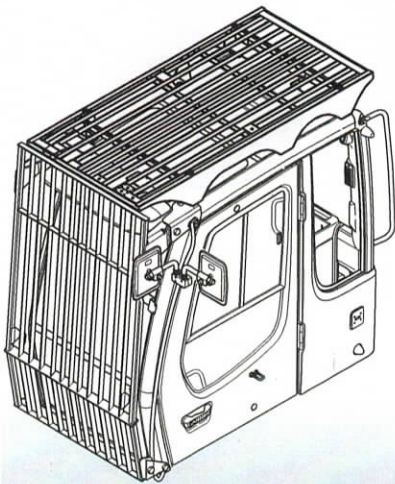

Grille above

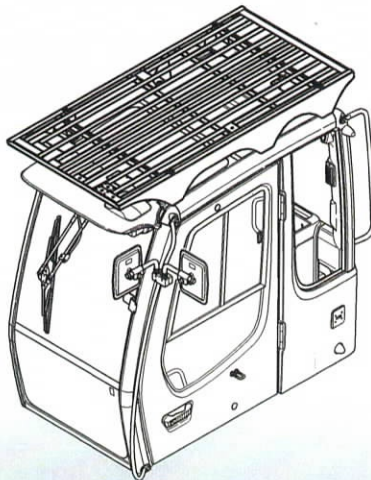

Grilles in front

